

Deposit Number	Material Description	Reserves (1000 m³)		Additional Comments	Texture (%)			Wear (%)	Overburden Thickness (m)	Deposit Thickness (m)	Deposit Area (ha)	Deposit Genesis	Additional Comments	
		Gravel	Sand		Gravel	Sand	Fines							
1	Gravel	306	39	Gravel coarse, sand coarse to fine grained, clean.	87.4	11.2	1.4	-	1.2	6	12	Valley train		
2	Sandy gravel and gravel	1390	578	Gravel coarse, sand fine and medium grained.	61.8 to 77.0	20.7 to 37.0	0.9 to 2.3	-	0.3 to 1.2	3 to 5.2 Avg. 3.7	120	Valley train		
3	Gravel	23	7	Gravel coarse, sand fine and medium grained, clean.	78.8	22.4	1.0	-	2.0	More than 1.8	4	Preglacial alluvial		
4	Gravel	376	116	Gravel coarse, and fine; sand fine to coarse grained, clean.	75.2	23.2	1.6	-	0.3 to 0.5	1.8 to 2.4	55	Kame		
5	Sand	92	519	Sand coarse and medium grained with layers of organic material; gravel coarse and fine.	-15	-85	-0	-	1	1.5	80	Valley train		
6	Sandy gravel	668	311	Gravel fine and coarse; sand fine to coarse grained.	66.8	31.1	1.1	-	-	3	77	Valley train		
7	-	-	-	Gravel coarse with pebbles and boulders.	-	-	-	-	0	More than 1.5	28	Esker		
8	Sandy gravel	1293	898	Gravel mainly coarse with some fine, moderately clean; sand fine and medium grained.	58.2	38.6	5.2	-	0.9 to 1.5	More than 1.5	240	Preglacial alluvial		
9	Sandy gravel	14820	82340	Gravel fine and coarse; sand fine and medium grained, clean and moderately clean.	50.4 to 66.3	32.7 to 39.0	0.6 to 1.0	-	0 to 3 Avg. 1.5	1.5 to 15 Avg. 4.5	5000	Preglacial alluvial		
10	Sandy gravel	109	79	Gravel coarse; sand from fine to coarse grained, clean.	57.3	41.4	1.3	-	1.2 to 1.5	2.4 to 6.4 Avg. 3.7	32	Marginal stream		
11	-	-	-	Assumed on basis of surface mapping or airphoto interpretation.	-	-	-	-	-	-	-	-	Valley train	
12	-	-	-	Assumed on basis of surface mapping or airphoto interpretation.	-	-	-	-	-	-	-	-	Preglacial alluvial	
13	-	-	-	Assumed on basis of surface mapping or airphoto interpretation.	-	-	-	-	-	-	-	-	Kame	

**Deposit Number** — Granular deposits shown on this map may have commercial possibilities. This assumption followed from two criteria used in the mapping process: study of the area considered only granular deposits greater than one metre thick, and covering an area more than one hectare; and it only considered deposits where the mineral aggregate thickness was greater than the overburden thickness. Although the scale of mapping did not permit investigation of all small deposits, many small deposits containing existing pits are indicated.

**Material Description** — Sand and gravel has a variety of applications, such as concrete for construction, asphalt concrete, subbase and base course aggregate for roads, gravel and sand for road surfaces, and pit run for fill. Gradation, rock hardness, and binding characteristics, are some of the specific qualities that are considered in aggregate towards determining its end use. This map indicates these, and other, geological qualities of the sand and gravel within each deposit, but does not indicate their potential uses. The terms used in the table are defined in the figure below.

**Reserves** — The method of calculating in cubic metres the aggregate reserves of deposits took four basic steps. First, the area, in hectares, of each deposit was determined using aerial photographs. Second, geological interpretation, sometimes supported by subsurface information, was assumed in determining the geometry of each deposit, to estimate an overall, average deposit thickness in metres. Third, geological study and limited sample analyses determined the texture (gradation) of sediments in the deposit, and an overall average percentage of gravel and sand. Finally, the volume was calculated as follows: reserve gravel (m³) = area (ha) × thickness (m) × 10,000 × % gravel; the same formula was used for sand.


**Texture** — The texture of the sediment refers to the percentage of particles of various sizes. For mineral aggregate, the most important fractions are the gravel and sand. The actual dimensions of the clasts and particles in these fractions are given in the figure. The values given for a particular deposit were determined from a field estimate, or from laboratory analysis, of one or more samples from that deposit. Where more than one sample is taken the tabulated number is the mean value.

**Wear** — The resistance of gravel-size clasts to wear or abrasion can be measured in a laboratory test (ASTM-C131, Los Angeles Abrasion Testing). The amount of material that breaks down into smaller sizes is measured and related to the original sample weight in terms of percent wear. The higher the percentage wear the more susceptible the gravel is to breakdown under stress. Gravel with a percentage wear of less than 40 is considered very resistant.


**Overburden Thickness** — The thickness of non-economic material, or overburden, covering a deposit, sometimes is a limiting factor in the exploitation of an aggregate deposit. The tabulated values given are approximate overburden thicknesses as determined from geological investigations and subsurface testing.

**Deposit Area** — Deposits in this study were delineated by interpretation of aerial photographs and the contacts should be considered approximate. Information is precise only where test holes, or geological sections, are indicated.

**Deposit Genesis** — The genesis, or formation, of deposits is vital to the understanding of the gradational nature, extent and geometry of the deposit. This understanding forms the basis for extrapolation from a limited number of known points (test holes, pits, sections) and permits an overall assessment of the deposit.

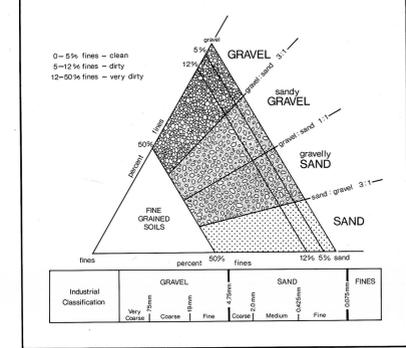

- Map Legend**
- 3 Deposit number
  - Assumed boundary
  - Active or inactive pit
  - Alberta Geological Survey test hole
  - Sand or gravel exposure
  - Buried sand or Gravel deposit



Produced by the SURVEYS AND MAPPING BRANCH, DEPARTMENT OF ENERGY, MINES AND TECHNICAL SERVICES, Ottawa, Ontario, Canada. Copies may be obtained from the Canada Map Office, Department of Energy, Mines and Technical Services, Ottawa, Ontario, Canada. © Canada Copyright Reserved 1978.

**SHANKS LAKE ALBERTA**  
 WEST OF FOURTH MERIDIAN - OUEST DU QUATRIÈME MÉRIDIEN  
 Scale 1:50,000 Échelle  
 Contour Interval: 25 FEET  
 Épaisseur des courbes: 25 PIEDS  
 Horizontal Scale: 1:50,000  
 Vertical Scale: 1:50,000

© Canada 1978, tous droits réservés.

**Alberta**  
 RESEARCH COUNCIL  
 Natural Resources Division  
**Alberta Geological Survey**

This is a sand and gravel resource map prepared by the Alberta Geological Survey as part of a series at a scale of 1:50,000. The series represents an ongoing aggregate inventory of Alberta which provides data for general land-use planning, land management or aggregate exploration. Please note that the delineation of deposits and calculation of reserves are approximations only. Alberta Energy and Natural Resources provides financial support for the Aggregate Inventory.

**REFERENCES:**  
 Geology and compilation by I. Shetsen; revised from Earth Sciences Report 61-4.

**AGGREGATE RESOURCES**  
 SHANKS LAKE 82H/2